




ROCKWOOL VentRock Stone Wool for Ventilated Facade System

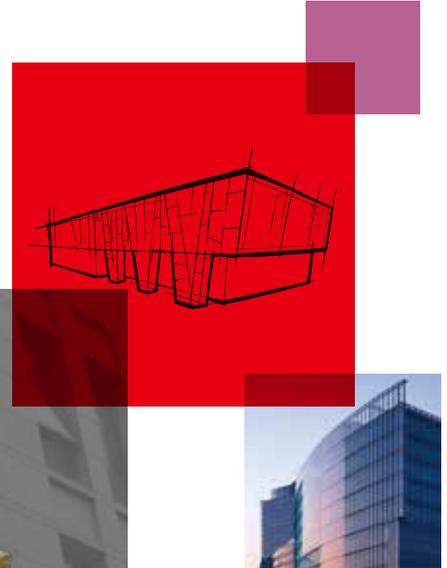

General Product Information

ROCKWOOL stone wool products are mainly made of natural stone.
The reliable 4-in-1 solutions of fire safety, acoustics, durability & sustainability.

ROCKWOOL stone wool products are non-combustible with a melting point of approximately 1000°C. They are specially formulated to provide fire protection, thermal insulation and sound reduction/absorption.

No CFCs, HFCs, HCFCs or asbestos are used in the manufacture of ROCKWOOL stone wool products.


ROCKWOOL VentRock

ROCKWOOL stone wool products are mainly made of natural stone.
The reliable 4-in-1 solutions of fire safety, acoustics, durability & sustainability.

Applications

VentRock is particularly designed for ventilated facade or rain-screen cladding system fixed on solid substrates such as concrete wall or brick wall. It can insulate new buildings and renovation buildings.

VentRock has basic compressive and tensile strength properties, very low water absorption and moisture absorption. The high aging resistance of VentRock guarantees its dimensionally stability, consistent thermal resistance and other physical properties. Together with its compatibility with other components used in ventilated facade or rain-screen cladding systems, VentRock protects buildings from fire while providing effective acoustic and thermal insulation performance.

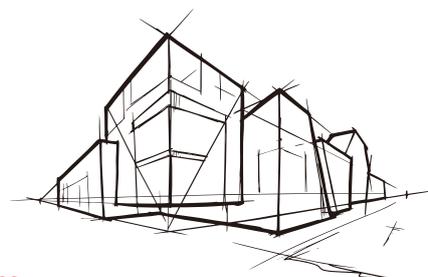

Product Features

- Compression and tensile strength meets the requirement of ventilated facade or rain-screen cladding.
- Excellent thermal properties to reduce the interstitial condensation in ventilated facade or rain-screen system.
- Excellent fire-resist performance. As a non-combustible material, ROCKWOOL VentRock does not produce burning droplets, promote flashover or release toxic gases during a fire.
- Excellent thermal insulation. It can increase exterior wall's thermal resistance and reduce energy consumption of building.
- Neutral or slightly alkaline and does not cause corrosion of metal materials.
- Excellent sound absorption property.
- Water repellency, moisture resistant.
- High Acidity index, aging-resist and stable.
- Light weight, easy for handling and installation.

1000°C

ROCKWOL stone wool is a non-combustible insulation material with a melting point of over 1000°C, especially for building insulation, fire protection and noise reduction.



ROCKWOOL is the world's leading supplier of stone wool innovative products and systems, dedicated to improving the environment and people's quality of life.

ROCKWOOL VentRock



ROCKWOOL stone wool products are mainly made of natural stone.
The reliable 4-in-1 solutions of fire safety, acoustics, durability & sustainability.

Structure

1. Substrate.
2. Vertical Profile.
3. Anchor.
4. VentRock slab (or faced with glass-fiber tissue etc.)
5. Cladding surface panel (Aluminum Panel, Granite, etc)

Packaging and Storage

VentRock is shrink-wrapped in polyethylene sheets for ease of handling, transportation, storage and identification. Do not expose directly to water source (rain/snow) during transportation to prevent damage to products. VentRock should be stored in an unheated room or in an open area covered with a tarpaulin.

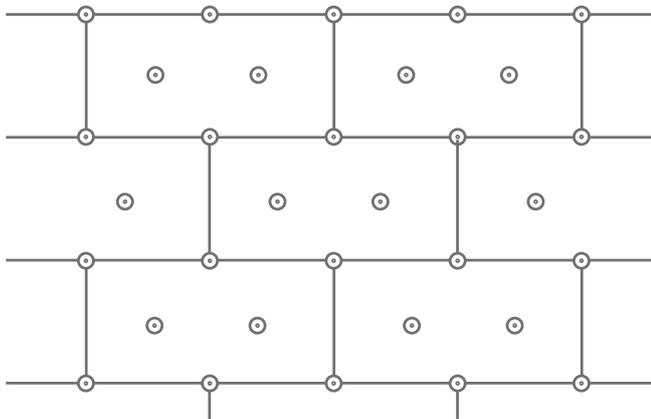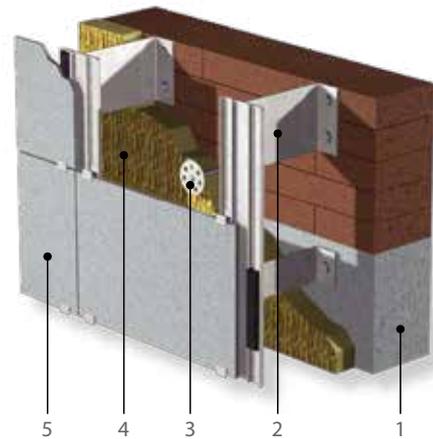

Layout Sketch of Anchoring

Design and Installation

- Slab can be fixed to the substrate by bonding and anchorage or fully anchorage.
- It is suggested the number of anchor not be less than 6 pieces per square meter and be increased within the edges and corner areas and higher wind suction areas. While positioning VentRock slab on substrate wall, the joints shall be staggered as the layout sketch and gaps between slabs shall be avoided as much as possible. Small slabs is suggested to be used as less as possible. If VentRock becomes damp or wet, the next installation step must be applied after it is dried naturally.
- VentRock should be cut by sharp cutters or hand saws.
- For other design and construction details of VentRock used in ventilated facade or rain-screen cladding system, please refer to relevant guideline provided by the system holder.

ROCKWOOL VentRock

ROCKWOOL stone wool products are mainly made of natural stone.
The reliable 4-in-1 solutions of fire safety, acoustics, durability & sustainability.


Standard Size

Code	Thickness (mm)	Size (mm)
VentRock 100	50 - 150	600 x 1200

Please contact your local sales representatives for sizes and densities not stated in the data sheet.

Facing

VentRock is available in plain, aluminium foil facing or one side glass tissue facing.

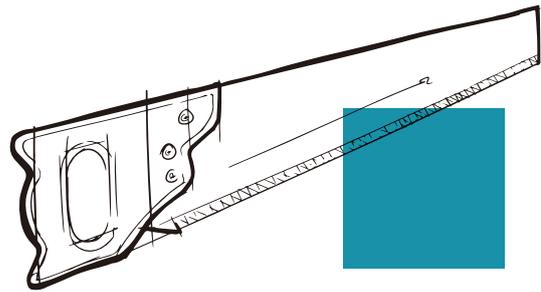

Technical Parameters

Code	VentRock 100	Unit	Standard
Nominal Density	100	Kg/m ³	GB/T 19686
Compressive Strength (vertical to surface)	≥ 10	kPa	GB 13480
Tensile Strength (vertical to surface)	≥ 2.5	kPa	JG 149-2003
Thermal Conductivity (λ 25°C)	≤ 0.034	W/mK	GB/T 10295
Fire Performance	A1 class non-combustible	-	GB/T 8624
Water Repellence	≥ 99	%	GB/T 10299
Water Absorption (Partial Immersion)	≤ 0.5	kg/m ²	GB/T 25975-2010
Water Vapour Absorption	≤ 0.5	%	GB/T 5480
Dimension Stability	≤ 1.0	%	GB/T 8811
Acidity Ratio	≥ 1.8	-	GB/T 5480
Shot Content (Shot Size > 0.25mm)	< 5	%	GB/T 5480
Melting temperature	> 1000	°C	DIN4102-17

Thermal Resistance for Reference

Thickness of VR100	Thermal Resistance	Unit
50 mm	1.47	m ² K/W
100 mm	2.94	m ² K/W
150 mm	4.41	m ² K/W

Note: The information contained in this data sheet is believed to be correct at the date of publication. ROCKWOOL Company does not accept responsibility for the consequences of using VentRock in applications different from those described above.

ROCKWOOL

Factory: 3 Taihua St, Yonghe Dist of Guangzhou Econ & Tech Development Dist, Guangzhou, Guangdong Province, P.R.C.

No.5, 4th Keyan Rd, Yizheng Econ & Tech Development Zone, Jiangsu Province (211400)

ROCKWOOL China Hotline: 400 665 0505

Beijing: (+86) 10 6590 6077

Guangzhou: (+86) 20 3839 3636

Taiwan: (+886) 4 2253 6866

www.rockwool.com.cn

Shanghai: (+86) 21 6211 6725

Hong Kong: (+852) 2754 0877

Philippines: (+63) 2 7710 650



Official WeChat