



Cool 'n' Comfort™ Blanket and Slab



General Product Information

ROCKWOOL stone wool products are made of basalt, a volcanic stone, which is the world's most abundant natural resource.

ROCKWOOL stone wool products are non-combustible with a melting point more than 1000°C. They are particularly suitable for thermal insulation, fire protection and sound reduction or absorption.

ROCKWOOL stone wool is inorganic and contains no nutritious substance. Therefore it will not be attacked by microorganisms. Stone wool will not rot and does not attract vermin.

No CFCs, HFCs, HCFCs, or asbestos are used in the manufacture of ROCKWOOL stone wool products.

Introduction

ROCKWOOL Cool 'n' Comfort series is designed for single or double skin metal roof, with or without skylight, to satisfy U-value requirements in order to achieve the desired roof thermal transmittance value (RTTV). It is also available with a radiant barrier facing to suit the requirements of all types of roofs



in commercial and industrial buildings.

Cool 'n' Comfort is highly effective in reducing solar heat gain through the roof for non air-conditioned buildings; and where air-conditions are used, Cool 'n' Comfort helps to save energy and reduce energy costs. The unique properties of Cool 'n' Comfort contribute to make an energy efficient, environmentally sustainable and fire safe roofing system, thereby creating a cool, comfortable and safe indoor environment.



Applications



Metal roofing systems are generally categorized as single skin metal roof or double skin metal roof. In single skin roof system, insulation is installed below the metal cladding sheet held by reinforcing steel wire mesh and aluminum foil rolled over purlins. This roofing system is an economically sound option for most industrial buildings. Cool 'n' Comfort RL Series is the ideal non-combustible light weight thermal insulation solution for single skin roofing system.

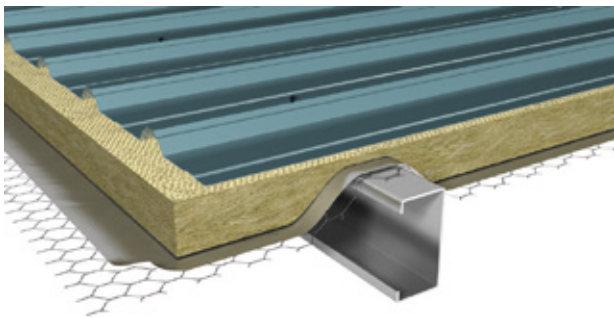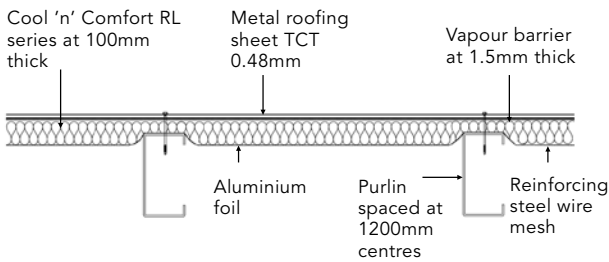

Single Skin Roof System

The double skin roofing system is a high performance roofing system comprising of an aesthetically designed trapezoidal or standing seam profile metal sheet on the top and a metal trapezoidal tray at the bottom. The two metal sheets are fixed together with a z-purlin creating a gap in the roof space for installation of insulation and vapor barrier. When coupled with Cool 'n' Comfort SL Series stone wool insulation, it boosts the performance of the double skin metal roofing system with improved level of thermal insulation, acoustic and fire protection.

Cool 'n' Comfort SL, a semi rigid slab product, is a versatile insulation that is available in various sizes to provide ease of installation and a perfect fit between purlins.

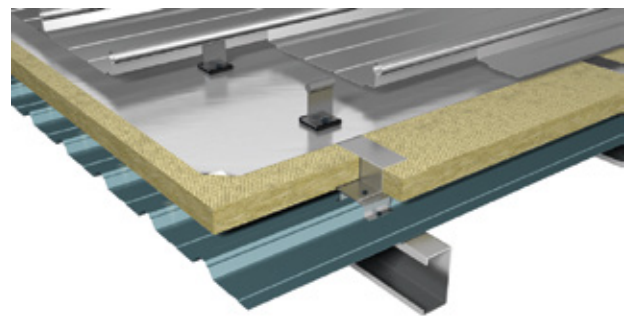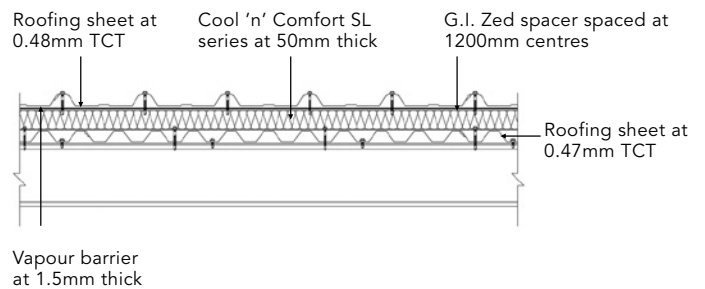

Double Skin Roof System

Note: All systems drawings are not drawn to scale.

Water Repellent

Cool 'n' Comfort Series is specially formulated with a silicone water repellent coated onto each strand of the stone wool fibres. *This special coating allows Cool 'n' Comfort to repel rain water that comes into contact with the product, at the same time ensuring the product's excellent thermal and acoustic performance even after exposure to water.

As Cool 'n' Comfort is commonly applied or left outdoor during installation, the silicone water repellent is added into the product as a standard offering.



Product Range and Packaging

Cool 'n' Comfort comes in the form of blankets or slabs to suit many different metal roofing designs and installation needs.


Cool 'n' Comfort is shrink-wrapped in polyethylene sheets for ease of handling, transportation and storage.



Selected range of blanket products are in compressed roll which gives significant reduction in size compared to folded blankets, thereby further reducing your warehousing cost. Please refer to the local sales representatives on the ranges that are available in compressed roll packaging.

Facings

Cool 'n' Comfort series is available as plain products and additionally with options of foil facing or glass tissue on oneside or two-sided.

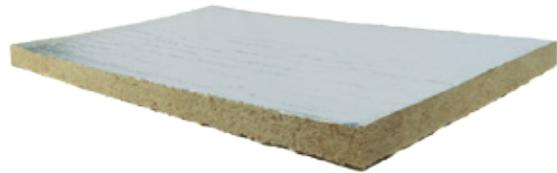

**Cool 'n' Comfort SL series
with foil facing**



**Cool 'n' Comfort RL series
without facing**

Standards

Cool 'n' Comfort is designed to meet the requirements of Malaysian Standard, MS1525 (Code of Practice on Energy Efficiency and Use of Renewable Energy for Non-Residential Buildings) and Singapore BCA Green Mark for Residential and Non-Residential (version 4.0).

**Note: Water repellent test standard is based on GBT 10299. For more information, please contact your local representatives.*

Technical Parameters

Product Name	Cool 'n' Comfort RL920	Cool 'n' Comfort RL940	Cool 'n' Comfort SL920	Cool 'n' Comfort SL940	Cool 'n' Comfort SL950	Cool 'n' Comfort SL960	Standard
R-value at 50mm thickness (m ² K/W)	1.39	1.47	1.39	1.47	1.47	1.47	
Thermal Conductivity 20°C λ Value (W/mk)	0.036	0.034	0.036	0.034	0.034	0.034	ASTM C518
Water Absorption (partial immersion (kg/m ²))	1.0	1.0	0.5	0.5	0.5	0.5	EN1609.97
Water Vapor Absorption	Less than 0.04 Vol %	Less than 0.04 Vol %	Less than 0.04 Vol %	Less than 0.04 Vol %	Less than 0.04 Vol %	Less than 0.04 Vol %	ASTM C1104 C1104M
Fire Performance Non Combustibility	A1 Non-combustible						EN 13501-1 BS EN 1182
Melting Point	More than 1000°C						ASTM E794
Form Factor	Blanket	Blanket	Slab	Slab	Slab	Slab	
Thickness (mm)	50, 75, 100						EN 822
Width x Length (mm)	1200 x 5000		600 x 1200				EN 822
Recommended for these common applications	Single skin metal roof for food centre or canteen, usually non air-condition, without walls and highly ventilated environment. Also commonly used in walkways and common pavilion in residential estates	Single skin metal roof for high end residential, to provide a better thermal performance and long term savings on energy bill	Double skin metal roof for residential & commercial buildings for general thermal performance	Double skin metal roof for industrial, warehouse and factory where higher insulation thickness is designed to be slightly compressed for acoustic damping of the metal roof	Double skin metal roof for exhibition hall, school & educational institute for versatile roof design and high durability	Double skin metal roof for concert hall & airport where high acoustic performance on low sound frequencies are required	

Sound absorption coefficient at different Octave Band (50mm thickness)

Product	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC	α _w
Cool 'n' Comfort RL920	0.20	0.60	1.00	1.00	1.00	1.00	1.00	0.90
Cool 'n' Comfort RL940	0.20	0.70	1.00	1.00	1.00	1.00	1.05	1.00
Cool 'n' Comfort SL920	0.20	0.60	1.00	1.00	1.00	1.00	1.00	0.90
Cool 'n' Comfort SL940	0.20	0.70	1.00	1.00	1.00	1.00	1.05	1.00
Cool 'n' Comfort SL950	0.20	0.75	1.00	1.00	1.00	1.00	1.05	1.00
Cool 'n' Comfort SL960	0.30	0.85	1.00	1.00	1.00	1.00	1.05	1.00

* For UL approved products, please contact our local representative.



SGBP 2018-1890
SGBP 2018-1892
SGBP 2018-1894
SGBP 2018-1895
SGBP 2018-1896



SGBP 2018-1891
SGBP 2018-1893



*Note: EUCEB only applicable for products produced in India & Malaysian factories

Disclaimer: The information contained in this data sheet is believed to be correct at the date of publication. ROCKWOOL does not accept responsibility for the consequences of using Cool 'n' Comfort™ Blanket and Slab in applications different from those described above.

Indonesia Representative Office
ROCKWOOL Malaysia Sdn Bhd
Wisma Pondok Indah Tower 3
17th Floor, Jl. Sultan Iskandar Muda V
Jakarta 12310, Indonesia
T (+62) 21 2965 9071
F (+62) 21 2953 8998

ROCKWOOL Malaysia Sdn Bhd
Lot 4, Solok Waja 1
Bukit Raja Industrial Estate
41050 Klang, Selangor, Malaysia
T (+60) 3 3341 3444
F (+60) 3 3342 7290

ROCKWOOL Building Materials (Singapore) Pte. Ltd
No 7, Tuas Avenue 1, Jurong Town,
Singapore 639492
T (+65) 6861 4722
T (+65) 6862 3533

Vietnam Representative Office
ROCKWOOL (Thailand) Limited
9th Floor, TNR Tower,
180-192 Nguyen Cong Tru Street,
District 1, Ho Chi Minh City, Vietnam
T (+84) 8 6288 2009
T (+84) 8 6288 4691